



## 600D-S

### FEATURES :



- ✓ Ideal For Double Swing Doors
- ✓ Dual Voltage Selectable (12 VDC / 24 VDC)
- ✓ Low Current Consumption
- ✓ Reliable Holding Force
- ✓ Durable & Silence Operation
- ✓ Cosmeticize Anodized Aluminum Casing
- ✓ Surge & Spike Protection PCB
- ✓ Anti-Tamper Jam Nuts
- ✓ Full Range Of Optional Brackets
- ✓ Anti Residual Magnetism Kick Off Button

### SPECIFICATIONS :

- 1 Voltage Input : 12 VDC / 24 VDC
- 2 Current Draw : 12V @ 480mA x2 (±5%) ;  
24V @ 240mA x2 (±5%)
- 3 Holding Force : Up to 600 lbs x2 (272 kg x2)
- 4 Anti-Rust Surface Treatment : Blue Zinc Plating
- 5 Operating Temperature : 0~55° C (32~131° F)
- 6 Operating Humidity : 0~95% (non condensing)
- 7 Weight : 3.80 kg (±1%)
- 8 Dimensions : Magnet - (L)500x(W)42x(T)25 mm  
Armature - (L)180x(W)38x(T)11 mm

**EBELCO** Electromagnetic locks 600 Series are known with its heavy duty together with its excellent holding force and remarkable standard feature.

The series are compliance to CE and Underwriters' Laboratories (UL). Products are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with its durability, quality and reliability.

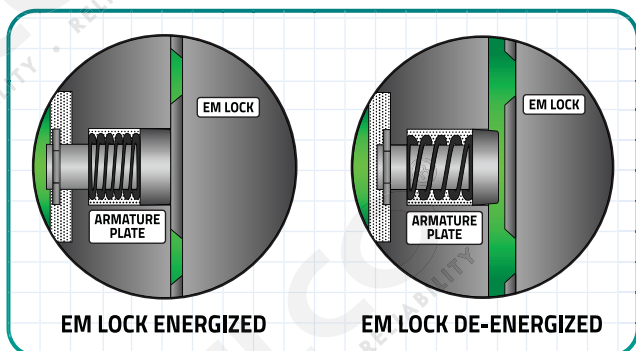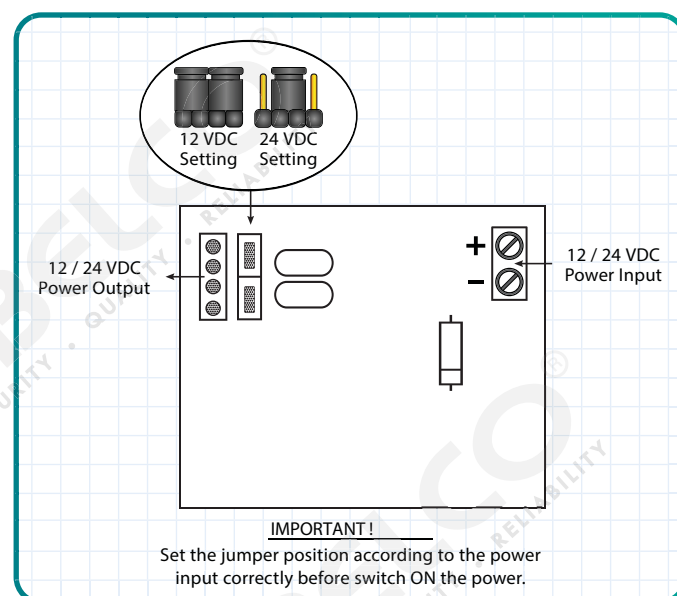

### \*Disclaimer :

**EBELCO** reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.



© EBELCO COPYRIGHT 2022.

SECURITY • QUALITY • RELIABILITY

**EBELCO INDUSTRIES SDN. BHD.** 474704-V

16, Jalan TTC 26, Taman Teknologi Cheng,  
75250, Melaka, Malaysia.

☎ : [+606] 333 8855

🖨 : [+606] 333 8822

🌐 : [www.ebelco.com](http://www.ebelco.com)

✉ : [enquiry@ebelco.com](mailto:enquiry@ebelco.com)



[WWW.EBELCO.COM](http://WWW.EBELCO.COM)