




1200D-LED-MC

FEATURES :

- ✓ Ideal For Double Swing Doors
- ✓ Dual Voltage Selectable (12 VDC / 24 VDC)
- ✓ Low Current Consumption
- ✓ Reliable Holding Force
- ✓ Hall Effect Sensor Monitoring Output
- ✓ Green/Red LED Indication For EM Lock Status
- ✓ Built-In Mag.Contact For Door Status Monitoring
- ✓ Durable & Silence Operation
- ✓ Cosmeticize Anodized Aluminum Casing
- ✓ Surge & Spike Protection PCB
- ✓ Anti-Tamper Jam Nuts
- ✓ Full Range Of Optional Brackets
- ✓ Anti Residual Magnetism Kick Off Button


SPECIFICATIONS :

- 1 Voltage Input : 12 VDC / 24 VDC (Per Magnet)
- 2 Current Draw : 12V @ 500mA x2 (±5%) ;
24V @ 265mA x2 (±5%)
- 3 Holding Force : Up to 1200 lbs x2 (545 kg x2)
- 4 Hall Effect Contact : SPDT rated 1A at 24 VDC
- 5 Magnet Contact Rating : 40 VDC, 0.25A, 10W
- 6 Anti-Rust Surface Treatment : Blue Zinc Plating
- 7 Operating Temperature : 0~55° C (32~131° F)
- 8 Operating Humidity : 0~95% (non condensing)
- 9 Weight : 9.40 kg (±1%)
- 10 Dimensions : Magnet - (L)532x(W)67x(T)39 mm
Armature - (L)185x(W)61x(T)16.5 mm

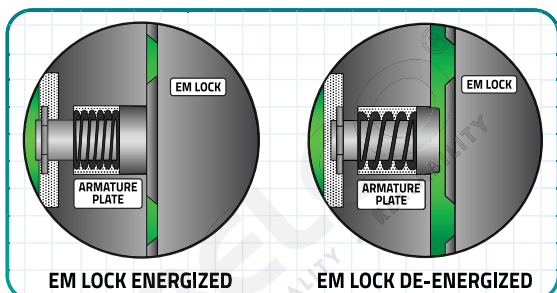

EBELCO Electromagnetic locks 1200 Series are known with its heavy duty together with its excellent holding force and remarkable standard feature.

The series are compliance to CE and Underwriters' Laboratories (UL). Products are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with its durability, quality and reliability.

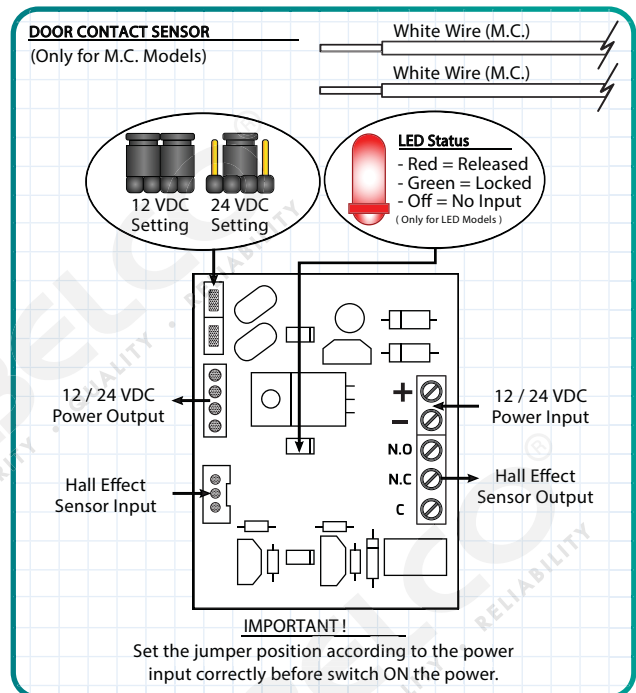

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.



© EBELCO COPYRIGHT 2022.



SECURITY . QUALITY . RELIABILITY

EBELCO INDUSTRIES SDN. BHD. 474704-V

16, Jalan TTC 26, Taman Teknologi Cheng,
75250, Melaka, Malaysia.

☎ : [+606] 333 8855

🖨 : [+606] 333 8822

🌐 : www.ebelco.com

✉ : enquiry@ebelco.com

WWW.EBELCO.COM