

## 1200D-LED-TB

## **FEATURES:**

- Magnetic lock. Designed with buzzer; when timer set up for 5~25 seconds as door close delay time. If the magnetic lock doesn't close after the set up time, the magnetic lock will alarm until the door close.
- ✓ Dual Voltage Selectable (12 VDC / 24 VDC)
- Selectable Re-Locking Timer 5, 10, 15, 25 Seconds
- Mailt-In Exit Push Switch Terminal
- **▼** Reliable Holding Force
- Mall Effect Sensor Monitoring Output
- **☑** Green/Red LED Indication For EM Lock Status
- **✓** Durable & Silence Operation ■
- Surge & Spike Protection PCB
- Anti-Tamper Jam Nuts
- ✓ Anti Residual Magnetism Kick Off Button

## **SPECIFICATIONS:**

- 1 Voltage Input: 12 VDC / 24 VDC (Per Magnet)
- 2 Current Draw: 12V @ 500mA x2 (±5%);
  - 24V @ 265mA x2 (±5%)
- 3 Holding Force: Up to 1200 lbs x2 (545 kg x2)
- 4 Hall Effect Contact: SPDT rated 1A at 24 VDC
- 5 Anti-Rust Surface Treatment : Blue Zinc Plating
- 6 Operating Temperature: 0~55° C (32~131° F)
- 7 Operating Humidity: 0~95% (non condensing)
- 8 Weight: 9.40 kg (±1%)

SECURITY


75250, Melaka, Malaysia.

9 **Dimensions**: Magnet - (L)532x(W)67x(T)39 mm

Armature - (L)185x(W)61x(T)16.5 mm

**EBELCO** Electromagnetic locks 1200 Series are known with its heavy duty together with its excellent holding force and remarkable standard feature.

The series are compliance to **CE** Underwriters' Laboratories (UL). Products are manufactured under the highest quality control to achieve the commitment to customer who

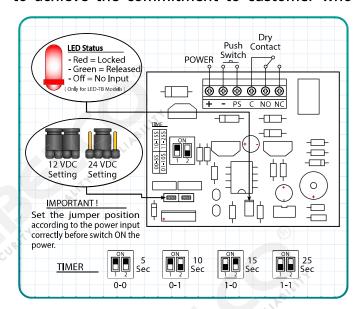

## \*Disclaimer :

**EBELCO** reserve the right to go ahead with any modifications of the models or features or price without forewarning All the information and specifications stated in this document are current at the time of publication







© EBELCO COPYRIGHT 2022.







