


BUTTON & SWITCHES

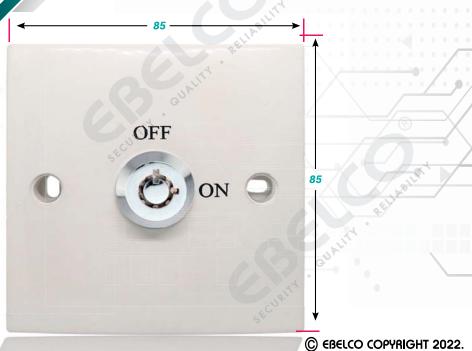

KS-33ABS

WHITE BEIGE ABS ABS KEY SWITCH

SPECIFICATION

White Beige ABS: Material

ABS Panel & Key Switch: Standard Structure

Common; NC; NO (SPDT): Operation

4Amp @ 125 VAC; 2Amp @ 250 VAC: Current Rating

50 g: Weight

(L)85 \times (W)85 \times (T)35 mm : Dimensions

WIRING DIAGRAM: ON / OFF Position S.P.D.T. Diagram Description OFF Switch OFF Close When Key Switch at OFF Position: 1-2Line 1-2 is Normally Close; COM Open Line 3-4 is Normally Open. Switch ON Open When Key Switch at ON Position: Line 1-2 is Normally Open; COM Close Line 3-4 is Normally Close. ** Legend: Line 1 - White Wire Line 2 - Red Wire Line 3 - Orange Wire Line 4 - Black Wire

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication

SECURITY

75250, Melaka, Malaysia.

QUALITY

16, Jalan TTC 26, Taman Teknologi Cheng,

RELIABILITY



