


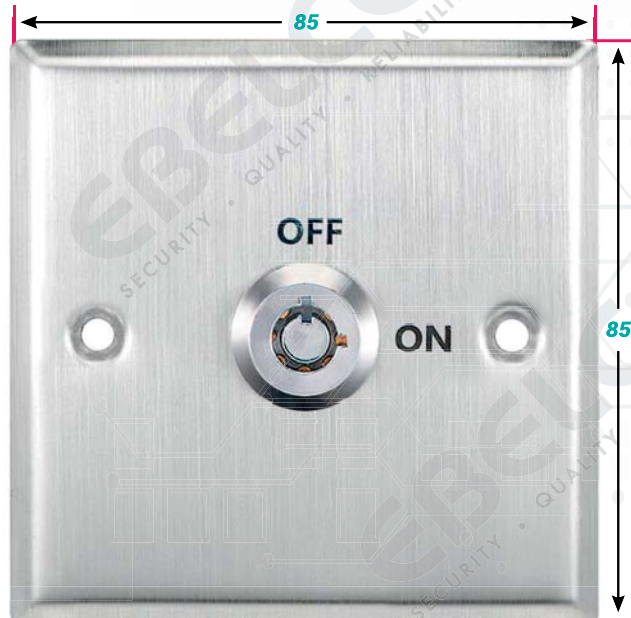

© EBELCO COPYRIGHT 2022.

KS-33SS

**STAINLESS STEEL
KEY SWITCH**

SPECIFICATION

- Stainless Steel Grade 304 : **Material**
- Stainless Steel Plate / Key Switch : **Standard Structure**
- Common ; NC ; NO (SPDT) : **Operation**
- 4Amp @ 125 VAC ; 2Amp @ 250 VAC : **Current Rating**
- 92.5 g : **Weight**
- (L)85 (W)85 (T)35 mm : **Dimensions**

WIRING DIAGRAM:

ON / OFF Position	S.P.D.T. Diagram	Description
	Switch OFF	When Key Switch at OFF Position: Line 1-2 is Normally Close; Line 3-4 is Normally Open.
	Switch ON	When Key Switch at ON Position: Line 1-2 is Normally Open; Line 3-4 is Normally Close.

** Legend: Line 1 - White Wire Line 2 - Red Wire
Line 3 - Orange Wire Line 4 - Black Wire

***Disclaimer :**

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

