

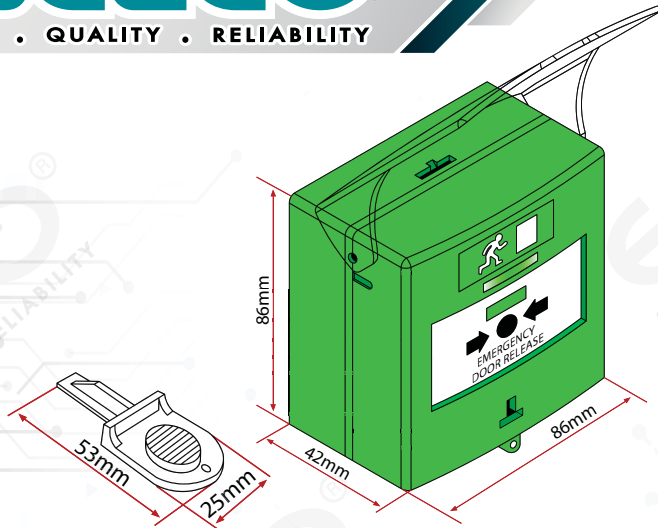


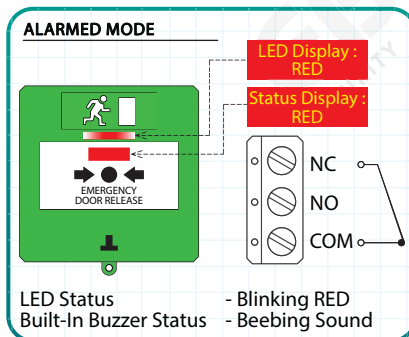


## EDR819L Series

### FEATURES :

- ✓ Resettable Design
- ✓ Built-In Buzzer Alarm
- ✓ Lock Hole For Authorize Personnel Usage
- ✓ Universal Key Design To Reset, Test / Install Easily
- ✓ Status Indicator Green / Red On The Front
- ✓ LED Indicator For Easily Exit In Dark Environment
- ✓ High Grade Components With Good Quality Guarantee
- ✓ Embedded / Surface Mounting Options
- ✓ Available In Color : Light Green
- ✓ Easy To Assemble, Clip On Design Between Casing, Simple & Fast Installation & Maintenance

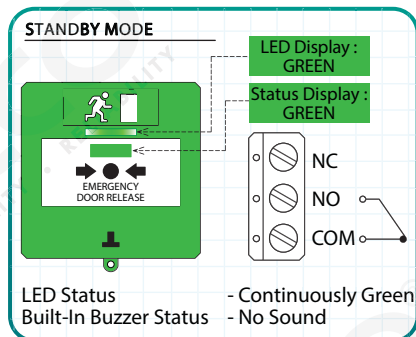

### BASIC WIRING DIAGRAM

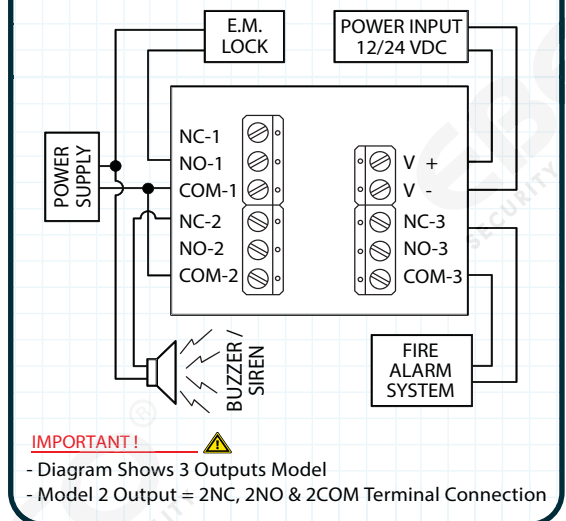

| SPECIFICATION          | MODELS                          |           |
|------------------------|---------------------------------|-----------|
|                        | EDR819L-2                       | EDR819L-3 |
| Output Point (C,NC,NO) | 2 Outputs                       | 3 Outputs |
| Voltage Input          | 12VDC / 24VDC (±5%)             |           |
| Current Draw (Standby) | 8mA (±5%)                       |           |
| Current Draw (Alarmed) | 20mA (±5%)                      |           |
| Built-In Buzzer        | Interval Wailing Max.60dB       |           |
| Status Indicator       | GREEN (Standby) / RED (Alarmed) |           |
| LED Indicator          | GREEN (Standby) / RED (Alarmed) |           |
| Max Current Rating     | 125Vac / 3A                     |           |
| Weight                 | 135g (±2%)                      |           |
| Dimension              | (L)86 x (W)86 x (T)42 (mm)      |           |
| Material               | ABS ; PC (Transparent Part)     |           |
| Terminal Connector     | Max. 2.0mm <sup>2</sup> Cable   |           |

### \*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

